

COMPANY PROFILE 公司简介 ➡



东莞市圣之荣电子有限公司是东莞市一家私营无刷电机产品相关企业，成立于2012年，产品符合CE，UL等产品安规认证，公司通过了ISO9001质量管理体系认证，公司风扇品牌为SZR。

圣之荣拥有专业研发、设计、生产的团队，主要从事中高端无刷风机，散热风扇，EC风扇，微型风扇，直流鼓风机，防水风扇，无刷电机的研发、生产、销售，产品类别包括轴流式、离心式、后倾式。产品应用于光伏、储能、新能源、服务器、工业设备、新能源、通信设备、医疗器械、仪器仪表、舞台灯光、机箱机柜、工业电源、通风散热系统等各类产品中。公司拥有各类研发设备及检测设备均为行业领先设备（盐雾实验设备、高低温实验设备、风量风压检测设备、光谱测试仪.....等。

Established in Dongguan, 2012, Dongguan Shengzhirong Electronics Co., Ltd. (SZR in brief) is a private company related to brushless motor products. The products meet CE, UL and other product safety certifications. SZR has passed ISO9001 quality management system certification, with the fan brand "SZR".

Shengzhirong has a professional R&D, design, and production team, mainly engaged in the R&D, production, and sales of mid-to-high-end brushless fans, cooling fans, EC fans, micro fans, DC blowers, waterproof fans, and brushless motors. Product categories include axial flow, centrifugal, backward inclined. Products are used in various products such as photovoltaics, energy storage, new energy, servers, new energy for industrial equipment, communication equipment, medical equipment, instrumentation, stage lighting, chassis cabinets, industrial power supplies, and ventilation and cooling systems. It is the industry-leading equipment that SZR owns for those of research and and testing, such as salt spray experimental equipment, high and low temperature experimental equipment, air volume and wind pressure testing equipment, spectrum tester...

COMPANY QUALIFICATIONS 公司资质 ➡

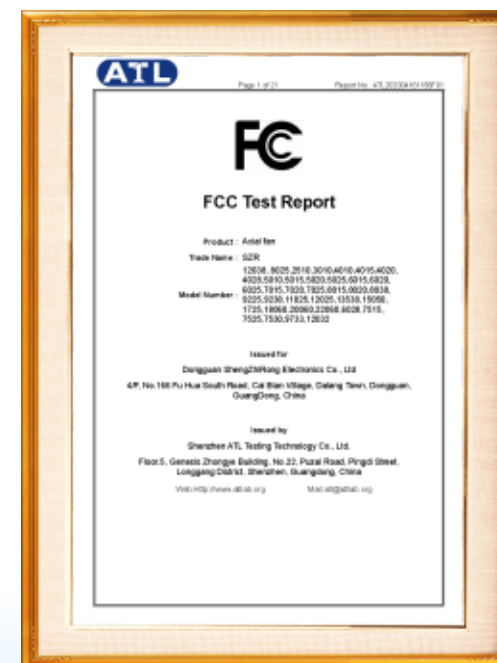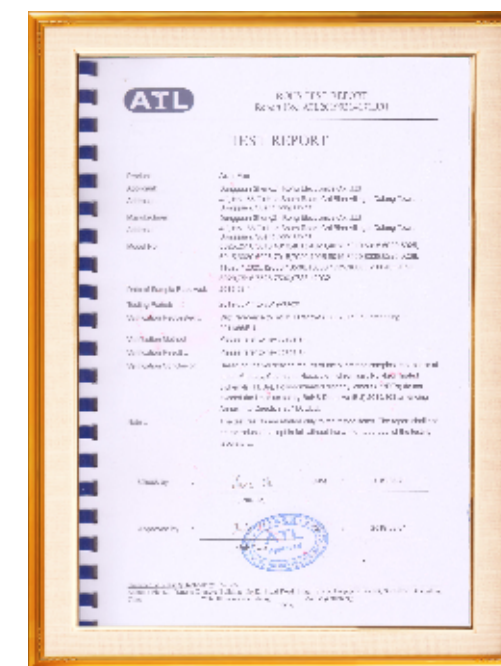




样品陈列区
Sample display area




样品房
Sample room

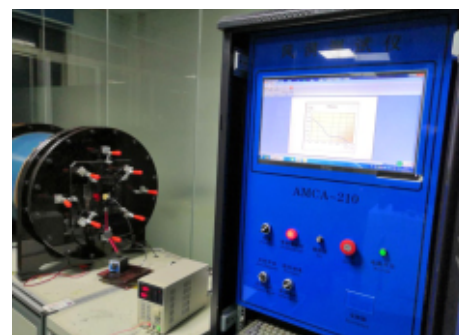

风洞测试仪
Wind tunnel teste




全自动绕线机Automatic winding machine

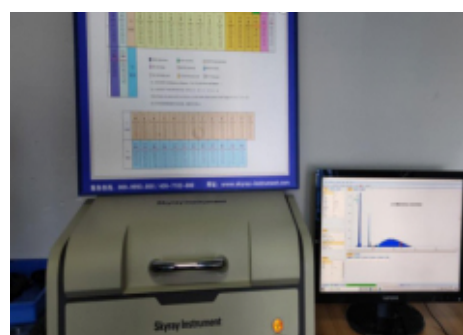

能量色散X荧光光谱仪
Energy Dispersive X-ray
Fluorescence Spectrometer



恒温恒湿箱
Humidity Chamber

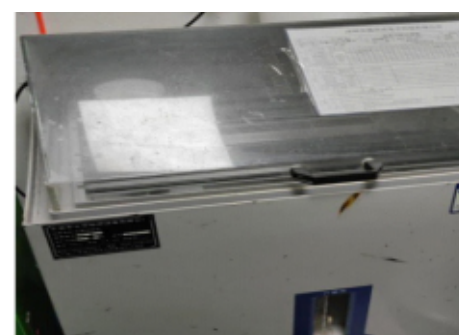

盐雾试验机
Salt spay test machine



自动焊接机Automatic welding machine



风扇噪声测试箱
Fan noise test box



风扇老化测试工作台
Fan aging test bench



组装线
Assembling line



爪式动平衡机Claw Dynamic balancing machine

目录 Contents

DC Axial fan (轴流风扇) Size (尺寸)	Page (页码)	DC Aluminum frame fan (铝框风扇) Size (尺寸)	Page (页码)
25MM	02	40MM	88
30MM	03	80MM	92
36MM	04	92MM	94
38MM	06	120MM	99
40MM	08	150MM	110
52MM	20	172MM	114
60MM	22	200MM	128
70MM	35	220MM	132
80MM	37		
90MM	59		
120MM	68		
127MM	81		
140MM	83		

DC Blower (鼓风机) Size (尺寸)	Page (页码)	DC Centrifugal Fan (离心风扇) Size (尺寸)	Page (页码)
30MM	135	70MM	167
35MM	136	100MM	169
40MM	137	120MM	172
45MM	139	133MM	176
50MM	140	150MM	177
52MM	144	175MM	179
58MM	146	190MM	183
60MM	148	225MM	185
75MM	151		
97MM	156		
120MM	160		
127MM	16		

目录 Contents

DC Double positive and negative Fan (双重正反风扇) Size (尺寸)	Page (页码)	DC Waterproof fan (防水风扇) Size (尺寸)	Page (页码)
40MM	189	25MM	196
60MM	191	40MM	197
		50MM	201
		60MM	205
		70MM	206
		80MM	208
		90MM	212
		120MM	214

DC ACDC Fan (EC风扇) Size (尺寸)	Page (页码)
60MM	220
80MM	221
92MM	227
120MM	231
150MM	236
172MM	239
200MM	247
220MM	249



DC轴流风扇
DC Axial Fan

25mm DC FAN

General Specifications


Material -----Frame:Plastics (Flammability:UL94V-0)
Impeller:Plastics (Flammability:UL94V-0)
Lead Wire-----+ Red - Black (Sensor) Brown (Control) Yellow
UL 1061 AWG#26 OR Equivalent
Storage Temperatur--- -30°C ~ +70°C (Non-comdensing)
Bearing Type----- Ball Bearing/Sleeve Bearing
Speed Range----- ±10%
Part Numbering System
SZR-AB2512MA- B R 1
Waterproof level:0=no,1=IP55,2=IP68
Sensor: 0=no,R=RD sensor ,F=FG sensor ,P=PWM sensor ,T=Temperature sensor
Bearing:S=sleeve bearing,B=ball bearing,Y=superflo bearing



25 X 25 X 10mm (Mass:8.6g)

ModelNo.	Rated Voltage	Operating Voltage	Rated Current	Rated Input	Speed	Maximum Air Flow		Max.StaticPressure		Noise
	VDC	VDC	AMP	Watt	R.PM	M3/min	CFM	MmH2O	IN H2O	dB-A
SZR-FB2505LA	5	4~6	0.06	0.3	5200	0.025	0.92	1.24	0.054	18.5
SZR-FB2505MA			0.09	0.45	7200	0.036	1.33	2.94	0.106	20
SZR-FB2505HA			0.13	0.65	10000	0.05	1.8	4.45	0.174	23.5
SZR-FB2505LHHA			0.2	1.0	13000	0.066	2.35	7.62	0.298	28
SZR-FB2512LA	12	9~13	0.04	0.48	5200	0.025	0.92	1.24	0.054	18.5
SZR-FB2512MA			0.06	0.72	7200	0.036	1.33	2.94	0.106	20
SZR-FB2512HA			0.08	0.96	10000	0.05	1.8	4.45	0.174	23.5
SZR-FB2512LHHA			0.1	1.2	13000	0.066	2.35	7.62	0.298	28

• Dimensions(unit:mm\inch)

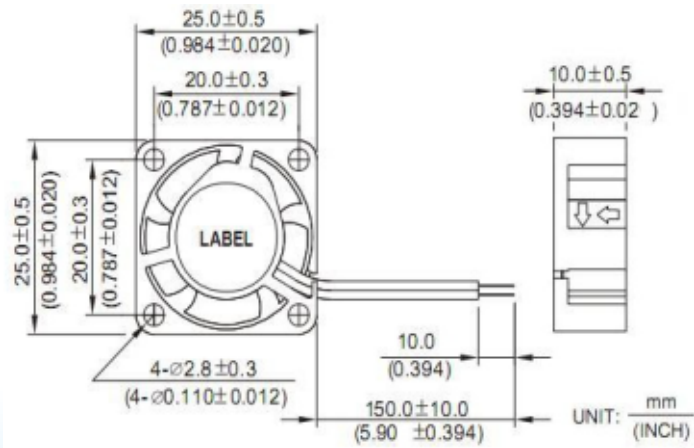

•Air Flow-Static Pressure Characteristics

